
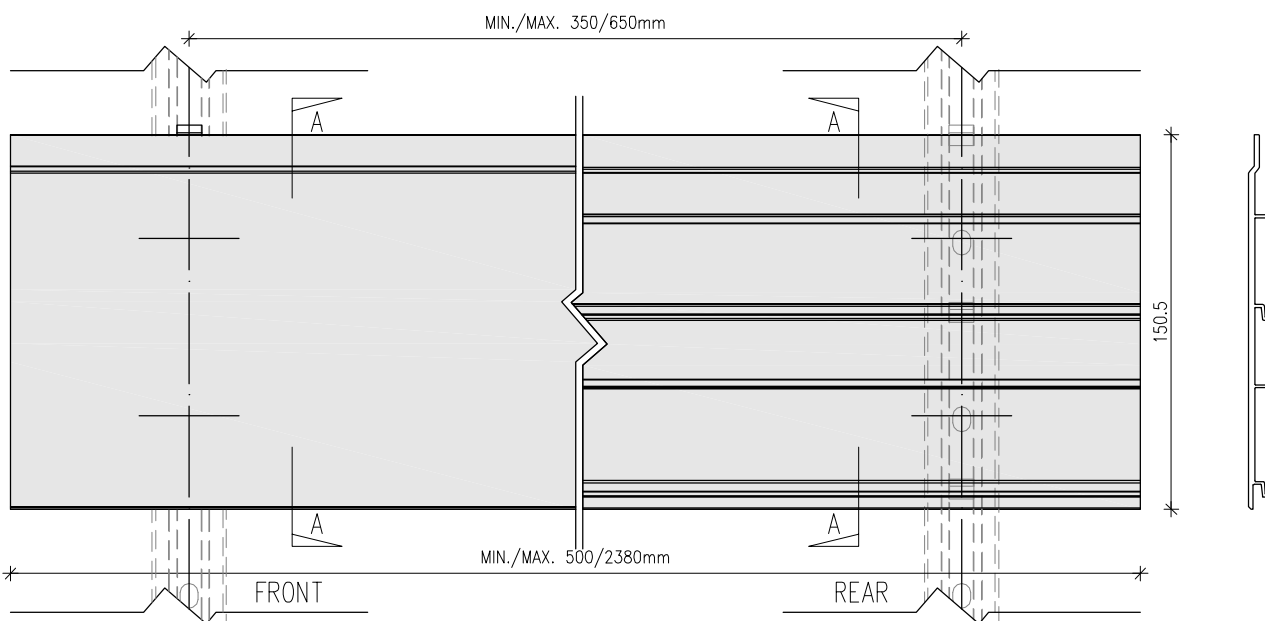
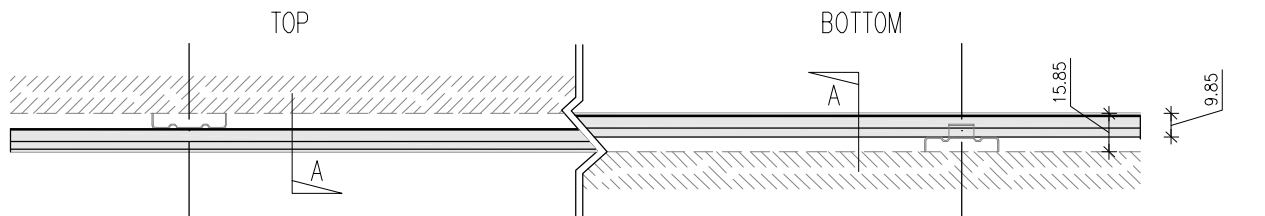


3D

A-A

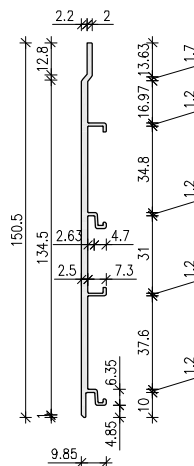

INFO:

Fire resistance class A2 (NRO).
 Manufacturer's warranty up to 15 years.
 Total cladding thickness only 17 mm.
 Made of PVC, laminated with Renolit EXOFOL multilayer foil of the MX, PX or FX series.
 Available in several hundred colors.
 High resistance to weather conditions, including UV rays.
 Panel length min/max 500/2380mm.
 Panel width nominal/coverage 151/142 mm.
 Weight (including mounting strip) 4.70 kg/m².
 Available DryTherm SEMS-KD option.
 Can be used with other Strama panels.

NOTS:

STRAMA PANELS

| | |
|---|-----------------|
| author: | |
| ENG. ARCHITECT DAMIAN ZAREMBA | |
| contact: | |
| tel.: +48 22 751 66 51 e-mail: biuro@stramagroup.com | |
| title: | |
| STRAMA PANELS Wood&Colour Design Facade panel SP-PVC 140 | |
| date: | version: |
| 15.09.2020 | 1.6 |
| scale: | page: |
| NONE | 1/1 |